



MAKE EVERYTHING EASIER





HAND PALLET TRUCK





DB

ECONOMIC DESIGN PALLET TRUCK

- Standard epoxy powder coat finish which is resistant to chips and normal corrosion.
- Exceptionally strong but light weight steel construction, service weight is only 55kgs.
- With welded joints and reinforced fork tips for most durability in the toughest applications.
- 3 position hand control - Raise, Lower, Neutral.
- Excellent turning angle of 190 degrees facilities.
- Number of pump strokes 12 times, lift height per stroke 11mm.
- Reliable oil leak-proof hydraulic system.

OPTION:



- 1) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.
- 2) Fork length: 800mm, 900mm, 1000mm, 1100mm.



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

Model		DB
Capacity	Q(kg)	2000
Lowered fork height	h_{13} (mm)	75
Steering wheel	mm	$\phi 160$
Fork wheel single	mm	$\phi 70 \times 80$
Fork wheel tandem	mm	$\phi 70 \times 60$
Max. lift height	h_3 (mm)	190
Total height	h_{14} (mm)	1176.5
Overall length	l_1 (mm)	1520/1590
Fork length	l (mm)	1150/1220
Width overall forks	b_5 (mm)	520/550/680
Ground clearance, centre of wheelbase	m_2 (mm)	22
Aisle width for pallets 1000x1200 crossways	A_{st} (mm)	1720/1790
Aisle width for pallets 800x1200 lengthways	A_{st} (mm)	1770/1790
Turning radius	W_a (mm)	1265/1335
Service weight	kg	53-62

Remarks: Special size fork width and length can be made according to customer's requirement.

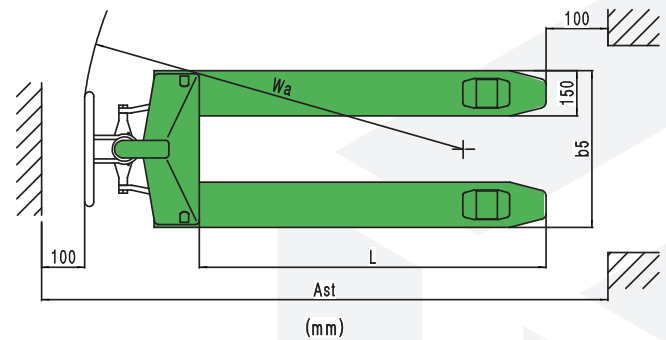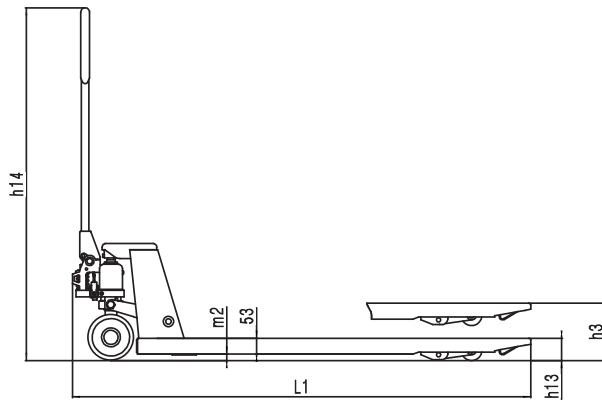



BF-III

HAND PALLET TRUCK


- Integrated pump without welding, no any leaking problems.
- Frame force is more reasonable, and the strength is more reliable.
- Handle seat has hole it is more convenient for installation of control chain.
- Forks lowering speed is controllable, with overload valve to avoid overloading.

OPTION:

- 1) steering wheel 200mm (fork wheel 80mm) are available.
- 2) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.
- 3) Fork length: 800mm, 900mm, 1000mm, 1100mm.
- 4) Foot pedal release.
- 5) Pump color: black painting.
- 6) Quick lift (double speed lifting).



Standard with entry & exist Roller
(option with single or double fork rollers)

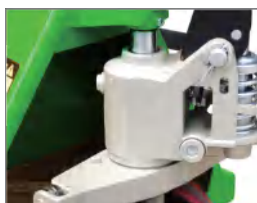



Integrated cast pump



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

Model		BF-III	
Capacity	Q(kg)	2500/3000	2500/3000
Lowered fork height	h_{13} (mm)	85	75
Steering wheel	mm	$\phi 180$	$\phi 180$
Fork wheel single	mm	$\phi 74 \times 93$	$\phi 74 \times 93$
Fork wheel double	mm	$\phi 74 \times 70$	$\phi 74 \times 70$
Max. Lifting height	h_3 (mm)	195	185
Height of tiller in drive position min./max.	h_{14} (mm)	1214	1214
Overall length	l_1 (mm)	1543/1613	1543/1613
Fork length	l (mm)	1150/1220	1150/1220
Width overall forks	b_5 (mm)	520/550/685	520/550/685
Ground clearance, center of wheelbase	m_2 (mm)	32	22
Aisle width for pallets 1000x1200 crossways	A_{st} (mm)	1743/1813	1743/1813
Aisle width for pallets 800x1200 lengthways	A_{st} (mm)	1793/1813	1793/1813
Turning radius	W_a (mm)	1276/1346	1276/1346
Service weight	kg	56-70	56-70

Remark: Special size fork width and length can be made according to customers requirement

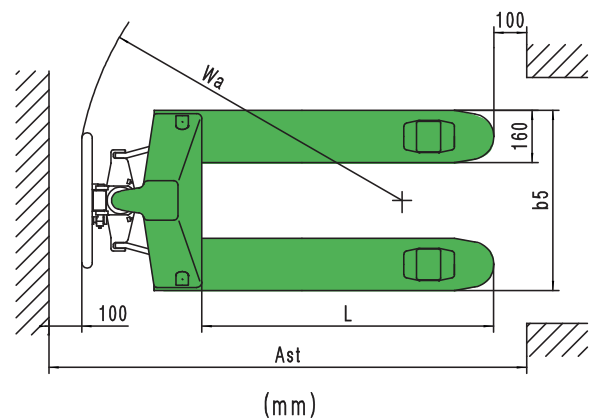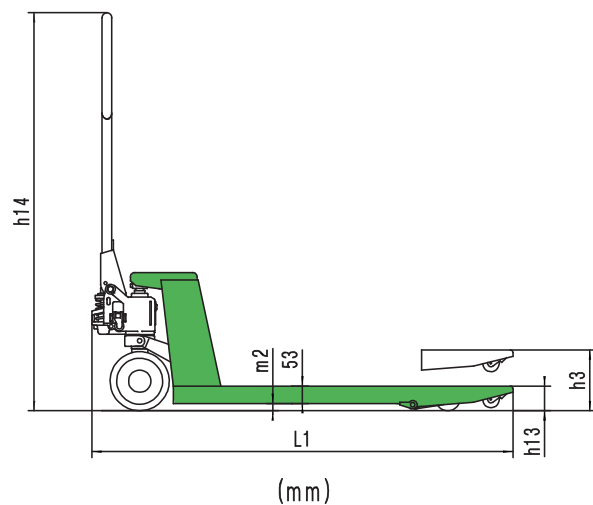

Wheel Option



Nylon wheel



Rubber wheel



PU wheel



PU wheel



BFC6-7E


BFC6-8E

Scale pallet truck with printer



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

Model		BFC6-7E / BFC6-8E
Capacity	(kg)	2000
Lowered fork height	(mm)	76/85
Total lit height	(mm)	165/175
Fork length	(mm)	1150
Width fork overall	(mm)	540/570/705
Steering wheel	(mm)	φ160
Fork wheel	(mm)	φ70
Power		Lead-acid battery
Max. deviation(weight)	(kg)	0.5
Max.deviation(rate)	(%)	±0.1%
Service weight	(kg)	133-142

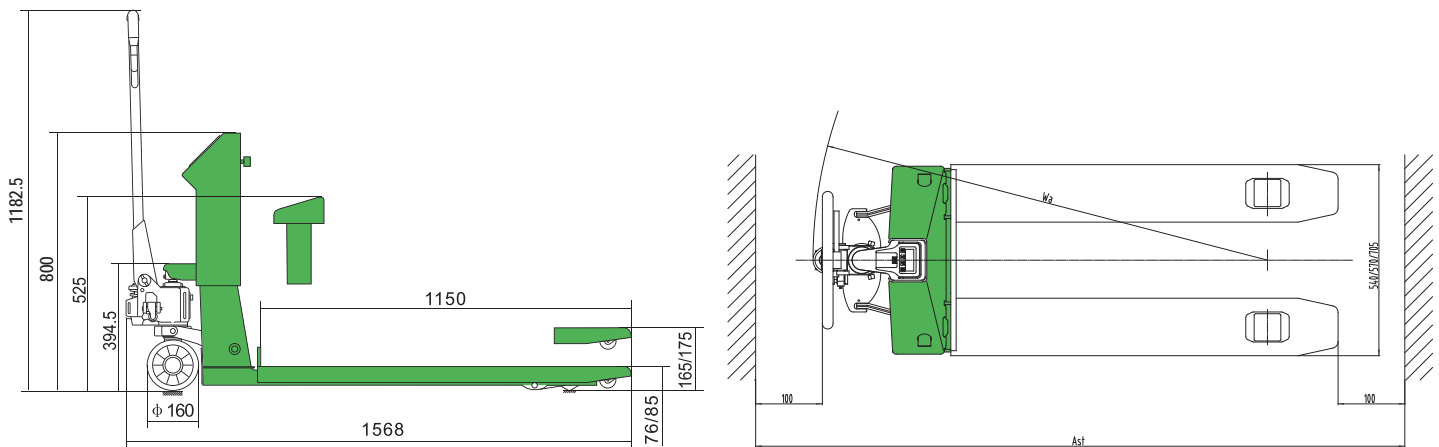

- Mobile pallet truck with scale combined two major function for pallet truck/scale, allows you to weigh cargo whatever, wherever, whenever you want.
- Power supply with rechargeable battery or with 86-264V AC input.
- Keypad and automatic tare functions.
- 1.2inches, super-large and bright LED display in solid state to be strike-free.
- Available in pounds or kilograms.
- A/D velocity: 27/s, a faster speed of weighing, more correct.
- Various functions: with extended functions as weight-checking, counting, etc., to satisfy different needs of customers.
- Conforms to EU' s ROHS standard.
- BFC6-8E is scale pallet truck with printer.



Stainless Steel Scale Truck


BFC6-7(S)

- The display appearance with simple design, concise and clear.
- Super large 5- digit LCD display screen .
- The scale accuracy, Maximum error 0.05%, weighing accuracy 0.5kg,max to 0.2kg.
- 4 function button, very easy and convenience to operation.
- The front of display with U protective shield, prevent instrument damaged during operation.



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

Model		BFC6-7(S)
Capacity	(kg)	2000
Lowered fork height	(mm)	76/85
Total lift height	(mm)	165/175
Fork length	(mm)	1150
Width overall forks	(mm)	540/570/705
Steering wheel	(mm)	φ 160
Fork wheel	(mm)	φ 70
Power		Lead-acid battery
Max deviation (weight)	(kg)	0.5
Max. deviation (rate)	(%)	±0.1%
Service weight	(kg)	130

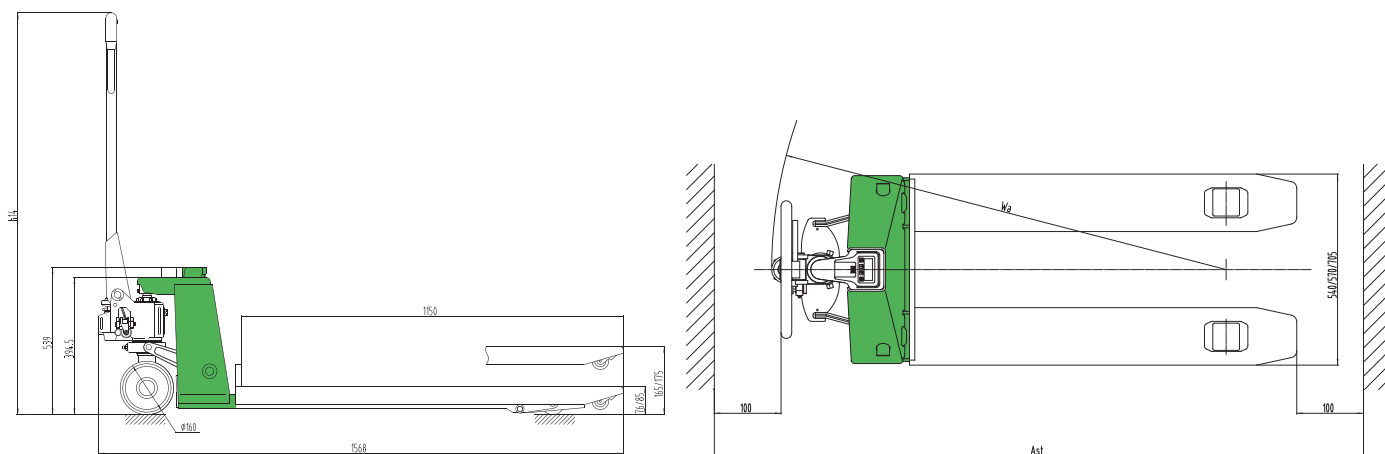



TEL: 0086-532-66739792

FAX: 0086-532-66739791

info@movmes.com

NO.88 Chunyang Road,Chengyang,
QINGDAO,CHINA

www.movmes.com