





MAKE EVERYTHING EASIER

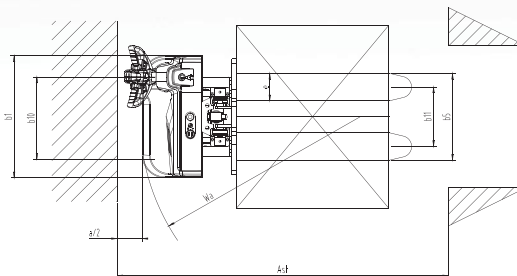

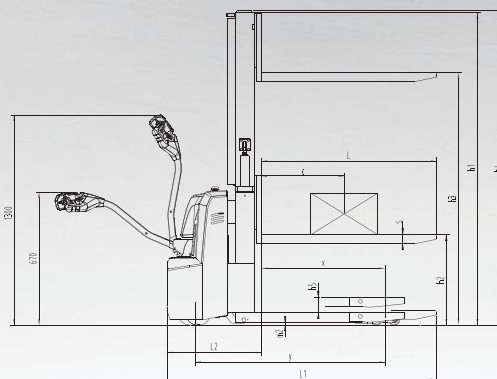

CDD10/12RDS-E

CDD10RDS-E type Double Decker trucks with very small chassis widely used in narrow and confined warehouse area, such as in delivery vans and elevators.

① With double decker, mast lift 1000kgs and support arm lift 1000kgs, total load is 1000kgs if use double pallet.

② Mast with excellent visibility for wide view of the forks.

③ Compact design With very small turning radius, offer a range of application option in very confined space.



Model		CDD10RDS-E	CDD12RDS-E
Drive: electric (battery type, mains, ...), diesel, petrol, fuel gas		Electric	Electric
Operator type: hand, pedestrian, standing, seated, order-picker		Pedestrian	Pedestrian
Rated capacity/rated load	Q (kg)	1000	1200
Load centre distance	c (mm)	600	600
Load distance, centre of drive axle to fork	x (mm)	812	812
Wheelbase	y (mm)	1272	1272
Service weight	kg	640	685
Axle loading, laden front/rear	kg	1035/605	1190/695
Axle loading, unladen front/rear	kg	182/458	194/491
Tyres: solid rubber, superelastic, pneumatic, polyurethane		Polyurethane	Polyurethane
Tyre size, front		€195*70	€195*70
Tyre size, rear		€80*70	€80*70
Additional wheels (dimensions)		€150*60	€150*60
Wheels, number front/rear (x = driven wheels)		1x+1/4	1x+1/4
Tread, front	b ₁₀ (mm)	523	523
Tread, rear	b ₁₁ (mm)	390	390
Height, mast lowered	h ₁ (mm)	2050/2400	2050/2400
Free lift	h ₂ (mm)	N/A	N/A
Lift	h ₃ (mm)	1600/1950	1600/1950
Height, mast extended	h ₄ (mm)	2060/2410	2060/2410
Initial lift	h ₅ (mm)	120	120
Height drawbar in driving position min./max.	h ₁₄ (mm)	670/1300	670/1300
Height of wheel arms	h ₈ (mm)	82/202	82/202
Height, lowered	h ₁₃ (mm)	90	90
Overall length	l ₁ (mm)	1690(1770)	1690(1770)
Length to face of forks	l ₂ (mm)	619	619
Overall width	b ₁ /b ₂ (mm)	800	800
Fork dimensions DIN ISO 2331	s/e/l (mm)	60/180/1070(1150)	60/180/1070(1150)
Fork spread	b ₅ (mm)	570	570
Ground clearance, centre of wheelbase	m ₂ (mm)	17-137	17-137
Aisle width for pallets 1000 × 1200 crossways	Ast (mm)	2286	2286
Aisle width for pallets 800 × 1200 lengthways	Ast (mm)	2224	2224
Turning radius	Wa (mm)	1450	1450
Travel speed, laden/unladen	km/h	4.5/5.0	4.5/5.0
Lift speed, laden/unladen	m/s	0.11/0.14	0.11/0.14
Lowering speed, lade/unladen	m/s	0.12/0.10	0.12/0.10
Max. gradeability, laden/unladen	%	6/15	6/15
Service brake		Electromagnetic	Electromagnetic
Drive motor rating S2 60 min	kW	0.65(DC)	0.65(DC)
Lift motor rating at S3 15%	kW	2.2	2.2
Battery voltage/nominal capacity K5	(V)/(Ah) or kWh	24/105(125)	24/105(125)
Battery weight	kg	60.8(70)	60.8(70)
Sound pressure level at the driver 's seat	dB (A)	70	70



TEL: 0086-532-66739792

FAX: 0086-532-66739791

info@movmes.com

NO.88 Chunyang Road,Chengyang,
QINGDAO,CHINA

www.movmes.com