



MOVME[®]

MAKE EVERYTHING EASIER





00109Q1226RIM/3302
00109E20323RIM/3302
00109S10127RIM/3302



CNAS C061-Q, E, S



DB

ECONOMIC DESIGN PALLET TRUCK

- Standard epoxy powder coat finish which is resistant to chips and normal corrosion.
- Exceptionally strong but light weight steel construction, service weight is only 55kgs.
- With welded joints and reinforced fork tips for most durability in the toughest applications.
- 3 position hand control - Raise, Lower, Neutral.
- Excellent turning angle of 190 degrees facilities.
- Number of pump strokes 12 times, lift height per stroke 11mm.
- Reliable oil leak-proof hydraulic system.

OPTION:



- 1) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.
- 2) Fork length: 800mm, 900mm, 1000mm, 1100mm.



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

Model		DB
Capacity	Q(kg)	2000
Lowered fork height	h_{13} (mm)	75
Steering wheel	mm	$\phi 160$
Fork wheel single	mm	$\phi 70 \times 80$
Fork wheel tandem	mm	$\phi 70 \times 60$
Max. lift height	h_3 (mm)	190
Total height	h_{14} (mm)	1176.5
Overall length	l_1 (mm)	1520/1590
Fork length	l (mm)	1150/1220
Width overall forks	b_5 (mm)	520/550/680
Ground clearance, centre of wheelbase	m_2 (mm)	22
Aisle width for pallets 1000x1200 crossways	A_{st} (mm)	1720/1790
Aisle width for pallets 800x1200 lengthways	A_{st} (mm)	1770/1790
Turning radius	W_a (mm)	1265/1335
Service weight	kg	53-62

Remarks: Special size fork width and length can be made according to customer's requirement.

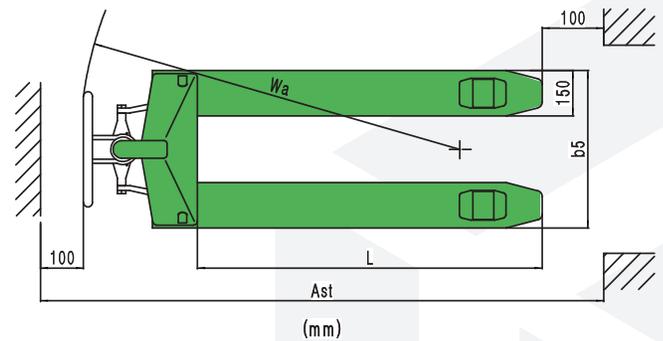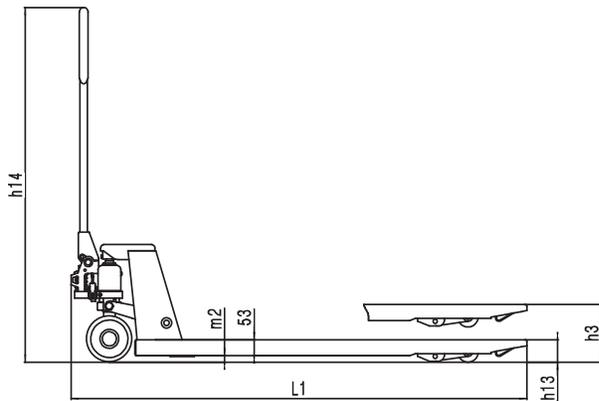



TEL: 0086-532-66739792

FAX: 0086-532-66739791

info@movmes.com

NO.88 Chunyang Road,Chengyang,

QINGDAO,CHINA

www.movmes.com