



MAKE EVERYTHING EASIER





BF-III

HAND PALLET TRUCK


- Integrated pump without welding, no any leaking problems.
- Frame force is more reasonable, and the strength is more reliable.
- Handle seat has hole it is more convenient for installation of control chain.
- Forks lowering speed is controllable, with overload valve to avoid overloading.

OPTION:

- 1) steering wheel 200mm (fork wheel 80mm) are available.
- 2) Nylon wheel, polyurethane wheel, rubber wheel, single fork roller or tandem fork rollers.
- 3) Fork length: 800mm, 900mm, 1000mm, 1100mm.
- 4) Foot pedal release.
- 5) Pump color: black painting.
- 6) Quick lift (double speed lifting).



Standard with entry & exist Roller
(option with single or double fork rollers)





Integrated cast pump



Conforms to EN ISO3691-5
Based on Directive 2006/42/EC

Model		BF-III	
Capacity	Q(kg)	2500/3000	2500/3000
Lowered fork height	h_{13} (mm)	85	75
Steering wheel	mm	$\phi 180$	$\phi 180$
Fork wheel single	mm	$\phi 74 \times 93$	$\phi 74 \times 93$
Fork wheel double	mm	$\phi 74 \times 70$	$\phi 74 \times 70$
Max. Lifting height	h_3 (mm)	195	185
Height of tiller in drive position min./max.	h_{14} (mm)	1214	1214
Overall length	l_1 (mm)	1543/1613	1543/1613
Fork length	l (mm)	1150/1220	1150/1220
Width overall forks	b_5 (mm)	520/550/685	520/550/685
Ground clearance, center of wheelbase	m_2 (mm)	32	22
Aisle width for pallets 1000x1200 crossways	A_{st} (mm)	1743/1813	1743/1813
Aisle width for pallets 800x1200 lengthways	A_{st} (mm)	1793/1813	1793/1813
Turning radius	W_a (mm)	1276/1346	1276/1346
Service weight	kg	56-70	56-70

Remark: Special size fork width and length can be made according to customers requirement

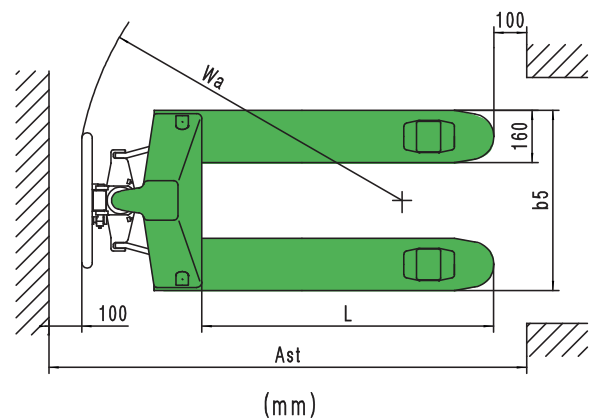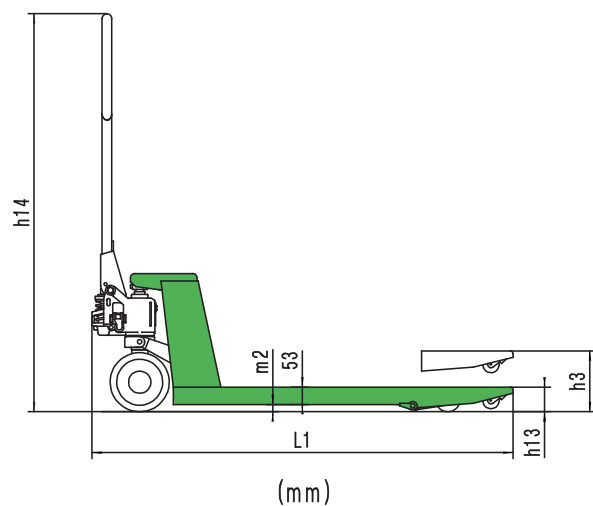

Wheel Option



Nylon wheel



Rubber wheel



PU wheel



PU wheel



TEL: 0086-532-66739792

FAX: 0086-532-66739791

info@movmes.com

NO.88 Chunyang Road,Chengyang,
QINGDAO,CHINA

www.movmes.com